




AIR CONDITIONING – TEMPERZONE DUCTED REVERSE CYCLE

The Temperzone range of Ducted Reverse Cycle Air Conditioning is renowned for its reliability and quality. For more than 40 years Temperzone have manufactured air conditioners in New Zealand and Australia, to cope with the extremes of the Australasian environment.



Temperzone ducted systems are concealed in the roof with slim line power units tucked away outside. Whisper quiet conditioned air is directed throughout the home or office situation through highly efficient ducting and discreet air outlets, which are designed to look good with any décor.

Temperzone systems are designed to reduce humidity by removing moisture and freshen the air by filtering out dust and pollens. They are guaranteed to provide effective cooling even when temperatures are up to 46°C outside.

Energy efficiency is an important feature of Temperzone heat pump air conditioning, in fact they are among the most efficient form of heating you can have. In winter the outdoor unit absorbs heat from the atmosphere and transfers it into your living areas. The reverse applies in summer. Hot air is absorbed from your living areas and transferred through the outdoor unit into the atmosphere. You can have all year comfort without the risk of dangerous fuels and fumes associated with other forms of heating.

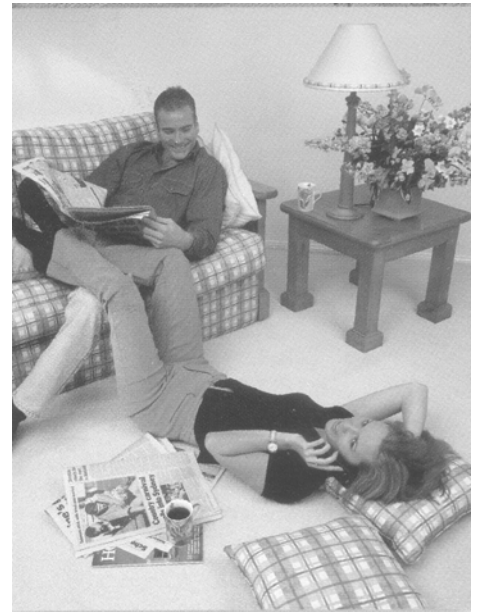

Realcold presents a range of Temperzone Ducted Split Systems on the following pages. We are also happy to discuss your requirements for both Large Ducted and Roof Top Package units, as well as Under-Ceiling/Console Units, which are available on application.

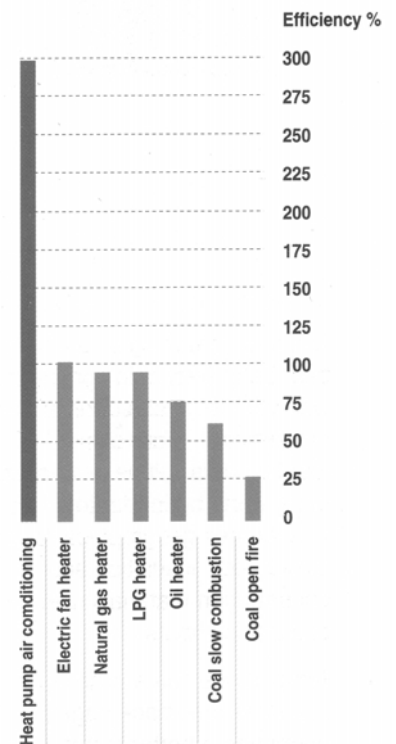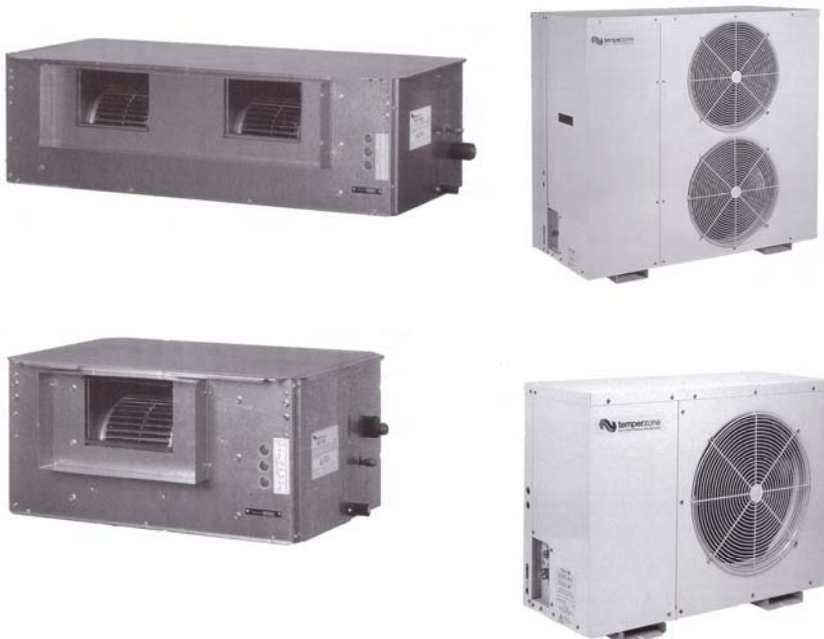

** High efficiency provides low running costs and a cleaner environment.*

AC16

October 2008



AIR CONDITIONING – DUCTED REVERSE CYCLE – R410A

Please note that some models of Indoor Unit can be purchased with or without a thermostat, as indicated. The matching Outdoor unit can also be purchased separately or along with the Indoor Unit. * 12 months warranty on parts ONLY.

REALCOLD STOCK NO	MODEL NUMBER	UNIT	NOMINAL CAP KW	NOISE (SPL)	WEIGHT (KG)	ELEC SUPPLY	PRICE \$ Excl GST
AC6200	ISDL55K	Indoor	C 5.2 H 4.6	55	28	230/1/50	POA
AC6201	ISDL55K-D	Indoor complete with thermostat					
AC6202	OSA 55RKS	Outdoor					
AC6205	ISDL80K	Indoor	C 7.7 H 7.6	57	36	230/1/50	POA
AC6206	ISDL80K-D	Indoor complete with thermostat					
AC6207	OSA 80RKS	Outdoor					
AC6210	ISDL 95K	Indoor	C 9.0 H 9.2	54	39	230/1/50	POA
AC6211	ISDL 95K-D	Indoor complete with thermostat					
AC6212	OSA 95RKS	Outdoor					
AC6213	ISDL 110K	Indoor	C 10.4 H 9.8	56	40	230/1/50	POA
AC6215	ISDL 110K-D	Indoor complete with thermostat					
AC6216	OSA 110RKS	Outdoor					
AC6217	OSA 110RKT	Outdoor					
AC6220	ISD 80K-DN	Indoor complete with thermostat	C 7.7 H 7.8	55	36	230/1/50	POA
AC6207	OSA80RKS	Outdoor					
AC6225	ISD 95K-DN	Indoor c/w t-stat & safety drain tray	C 9.3 H 9.2	56	39	230/1/50	POA
AC6212	OSA 95RKS	Outdoor					
AC6230	ISD 110K-DN	Indoor c/w t-stat & safety drain tray	C 11 H 10.3	53	40	230/1/50	POA
AC6216	OSA 110RKS	Outdoor					
AC6217	OSA 110RKT	Outdoor					






AIR CONDITIONING – DUCTED REVERSE CYCLE – R410A

Please note that the matching Outdoor unit can be purchased separately or along with the Indoor Unit * 12 months warranty on parts ONLY.

REALCOL D STOCK NO	MODEL NUMBER	UNIT	NOMINAL CAP kW	NOISE (SPL)	WEIGHT (KG)	ELEC SUPPLY	PRICE \$ Excl GST
AC6235	ISD140K-DN	Indoor c/w t-stat & safety drain tray	C 13.8 H 13.1	64	46	230/1/50	POA
AC6236	OSA140RKSH	Outdoor		67	116	230/1/50	
AC6237	OSA140RKTH	Outdoor		67	116	400/3/50	
AC6240	ISD160K-DN	Indoor c/w t-stat & safety drain tray	C 15.5 H 15.2	66	46	230/1/50	POA
AC6241	OSA160RKSH	Outdoor		70	133	230/1/50	
AC6242	OSA160RKTH	Outdoor		70	133	400/3/50	
AC6245	ISD182K-DN	Indoor c/w t-stat & safety drain tray	C 17.9 H 17.1	63	54	230/1/50	POA
AC6246	OSA182RKTH	Outdoor		70	137	400/3/50	
AC6247	OSA182RKTV	Outdoor		68	137	400/3/50	
AC6250	ISD223K-DN	Indoor c/w t-stat & safety drain tray	C 23.7 H 21.6	63	61	230/1/50	POA
AC6251	OSA223RKTV	Outdoor		67	148	400/3/50	
AC6255	ISD270K-DN	Indoor c/w t-stat & safety drain tray	C 26.8 H 25.3	70	93	230/1/50	POA
AC6256	OSA 270RKTH	Outdoor		70	198	400/3/50	

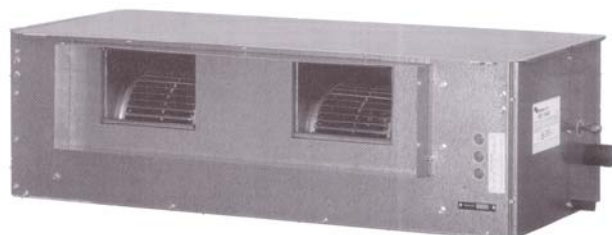


AC18





October 2008



AIR CONDITIONING – DUCTED ACCESSORIES – R410A Models



REALCOLD STOCK NO	DESCRIPTION	PRICE \$ Excl GST
Supply Air Plenums (Oval Spigots)		
ACST0001	for ISD 80K, 95K (1 x 400 dia.)	POA
ACST0002	for ISD 80K, 95k (2 x 300 dia.)	
ACST0003	for ISD 110K, 140K (2 x 350 dia.)	
ACST0004	for ISD 160K (3 x 350 dia.)	
ACST0005	for ISD 182K, 223K (3 x 400 dia.)	
ACST0207	for ISD 270K (3 x 400 dia)	POA
Return Air Plenums (Oval Spigots)		
ACST0201	for ISD 80K (1 x 450 dia.)	POA
ACST0202	for ISD 95K (2 x 300 dia.)	
ACST0203	for ISD 110K, 140K (2 x 350 dia.)	
ACST0204	for ISD 160K (2 x 400 dia.)	
ACST0205	for ISD 182K (2 x 450 dia.)	
ACST0206	for ISD 223K (2 x 450 dia)	
ACST0207	for ISD 270K (3 x 400 dia)	
Fresh Air Inlet Spigots (for R/A Plenums)		
ACST0015	for ISD 80K-140K 150 dia.)	POA
ACST0016	for ISD 182K-270K (200 dia.)	
Filter Box c/w filter rated EU2 (supplied separately)		
ACST0208	for ISDL 55K	POA
ACST0209	for ISDL 80K	
ACST0210	for ISDL 95K	
ACST0211	for ISDL 110K	
ASCT0212	for ISD 80K	
ACST0213	for ISD 95K	
ACST0214	for ISD 110K, 140K	
ACST0215	for ISD 160K	
ACST0216	for ISD 182K	
ACST0217	for ISD 223K	
ACST0218	for ISD 270K	
Spring Mounting Kit		
ACST0219	for ISDL 55K-110K, ISD 80K-182K (no.1)	POA
ACST0040	for ISD 223K, 270K (no.2)	
Safety Drain Tray (c/w Brackets)		
Available on request		POA
Anti-Vibration Mounts (Rubber)		
ACST0049	for OSA 55-270RK Outdoor Units (set of 4)	POA
Electric Heat Kits		
Factory fitted electric heat kits are available for the ISDL range of air handlers		POA
Electric Heater Boxes are available separately		POA
Dividing Plate (for adapting S/A plenums to electric heater boxes)		
Dividing plates sold separately		POA



POA – Price on Application



AIR CONDITIONING – CONTROLS



Please contact your local branch for the range of controllers and accessories.

AIR CONDITIONING – UNDER-CEILING



REALCOLD STOCK NO	MODEL NUMBER	UNIT	NOMINAL CAP kW	NOISE (SPL)	WEIGHT (KG)	ELEC SUPPLY	PRICE \$ Excl GST
AC6221	ISU 90KD	Indoor	C 8.6 H 8.2	44	48	230/1/50	POA
AC6209	OSA 90RKS	Outdoor		52	86	230/1/50	
AC6234	ISU140KD	Indoor	C 13.2 H 12.6	44	93	230/1/50	POA
AC6236	OSA 140RKSH	Outdoor		54	116	230/1/50	
AC6237	OSA 140RKTH	Outdoor		54	116	400/1/50	
AC6243	ISU160KD	Indoor	C 15.0 H 14.6	41	93	230/1/50	POA
AC6241	OSA 160RKSH	Outdoor		57	133	230/1/50	
AC6242	OSA 160RKTH	Outdoor		57	133	400/1/50	